



Choice of Materials

Woven fabric
Polyester PES
Polypropylene PP
Polyamide PA (Nylon)
Polyaramid AR (Nomex, Conex)
Acrylic PAN homo-polymer, co-polymer
Polyphenylene sulphide PPS (Ryton)
Polyimide PI (P84)
PTFE (Fluorocarbon)
Glass Fibres


Woven fabric

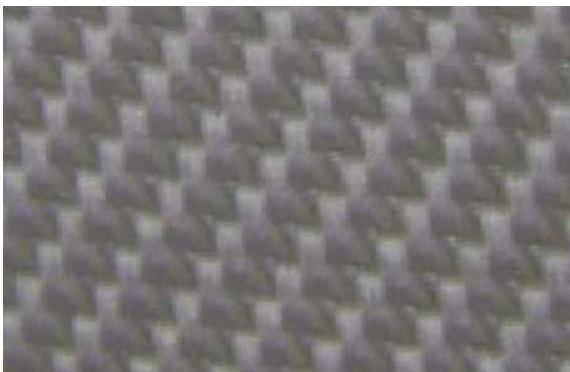

SK 25F

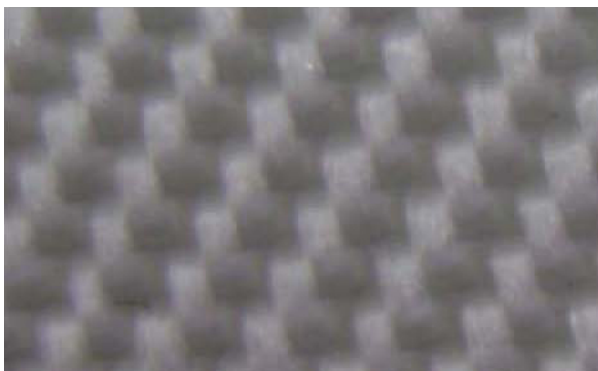

SK 2D

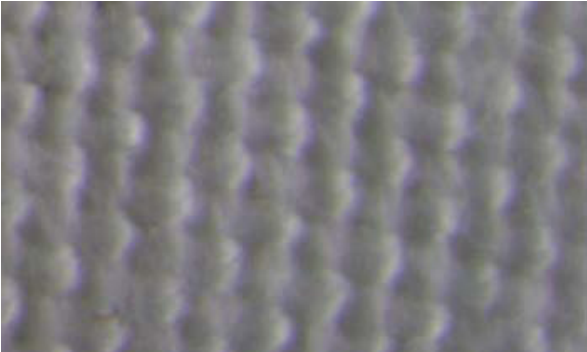

PE 550 Resistant to acids, alkalis, 150 °C continuous temperature. High resistance to oxidation, Low



PE 500 g/m2+OR



PE 500 g/m2+OR




PE 500 g/m2 + Anti + OR



PE 500 g/m2



PE 550 g/m2

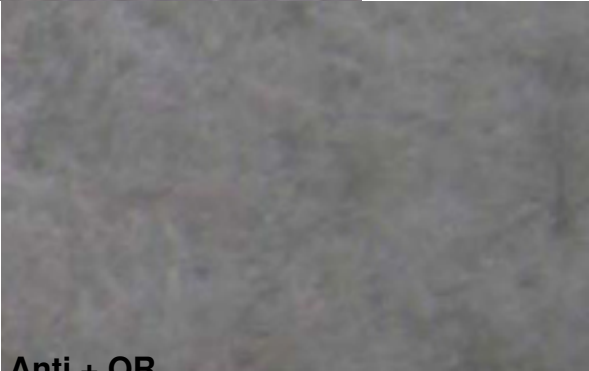

PE 550 g/m2 + Anti + OR



PE 550 g/m2 + OR



PE 550 g/m2 + Anti



PE 400 g/m2+OR



PE 400 g/m2+Anti+OR




DE 035 g/m2



Aramic (Thailand) Co.,Ltd.
(662) 321 2711-2


Contact Us

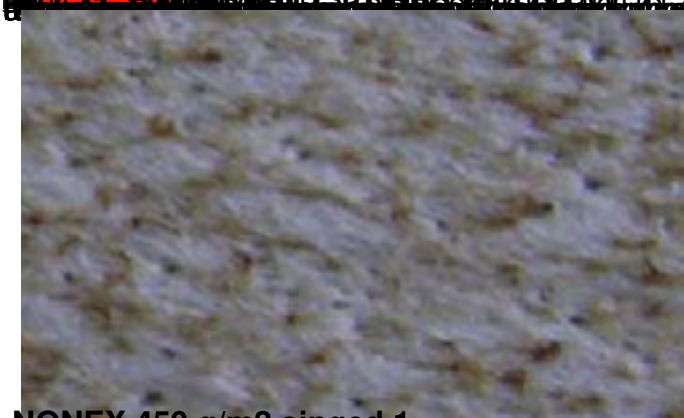

NONEX 450 g/m2 singed 1




NONEX 450 g/m2 singed 2

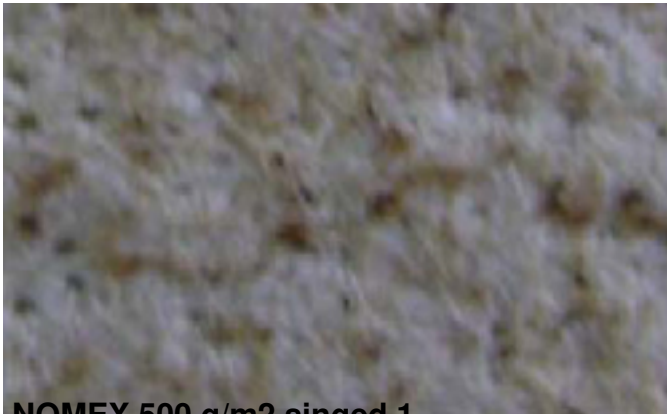


NOMEX 500 g/m2 singed 1



NOMEX 500 g/m2 singed 2

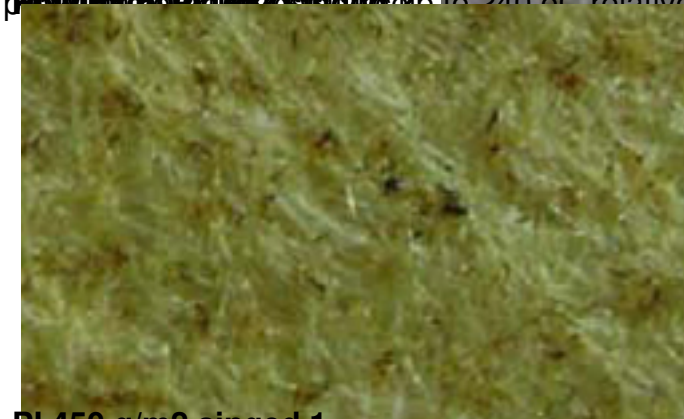

PI 450 g/m2 singed 1

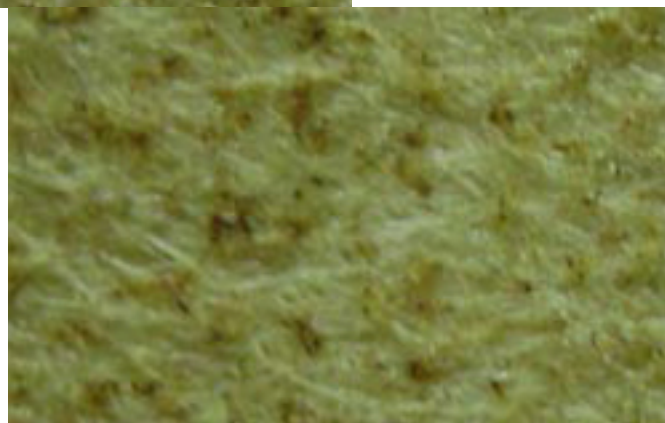

PI 550 g/m2 singed 1

