

Choice of Materials

Woven fabric

Polyester PES

Polypropylene PP

Polyamide PA (Nylon)

Polyaramid AR (Nomex, Conex)

Acrylic PAN homo-polymer, co-polymer


Polyphenylene sulphide PPS (Ryton)

Polyimide PI (P84)


PTFE (Fluorocarbon)

Glass Fibres

Woven fabric

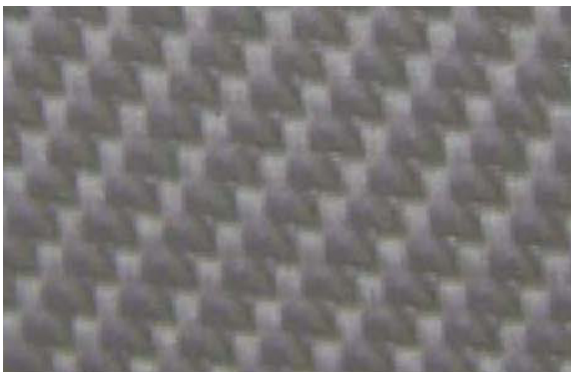



SK 25F

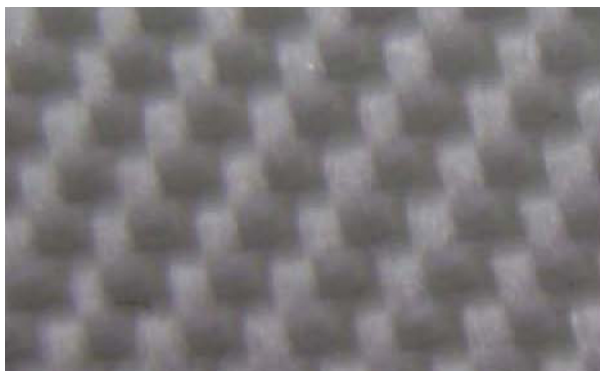

SK 2D



100





PE 550 g/m2



PE 550 g/m2 + Anti + OR



PE 550 g/m2 + OR



PE 550 g/m2 + Anti



PE 400 g/m2+OR



PE 400 g/m2+Anti+OR



PE 400 g/m2



Aramic (Thailand) Co., Ltd.
(662) 321 2711-2
Contact Us



NONEX 450 g/m2 singed 1




NONEX 450 g/m2 singed 2




NOMEX 500 g/m2 singed 1



NOMEX 500 g/m2 singed 2 340°C resistant to acid dew points. High peak temperature resistance.

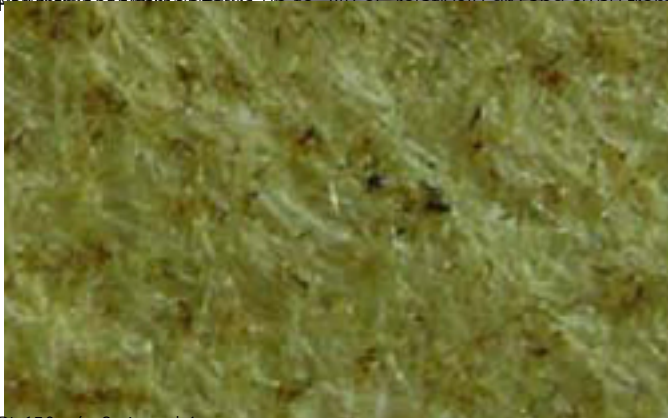

PI 450 g/m2 singed 1

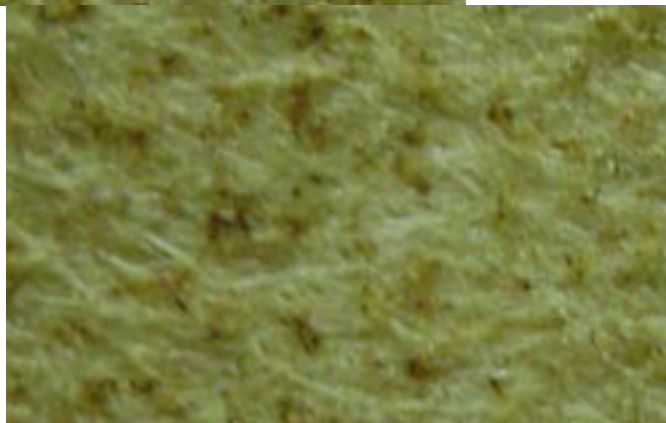

PI 550 g/m2 singed 1

